

CERAMAGUARD (100% RH)

www.armstrong.eu



CERAMAGUARD (100% RH)




CERAMAGUARD

BOARD



Prelude XL² / TLX / *Corrosive Resistant 24 mm / Clean Room Grid 24 mm



600 x 600 x 15 mm
600 x 1200 x 15 mm


607 M
608 M



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.55(MH)	0.60	0.25	0.30	0.50	0.80	0.85	0.75	α_p

Sound Absorption Class = D

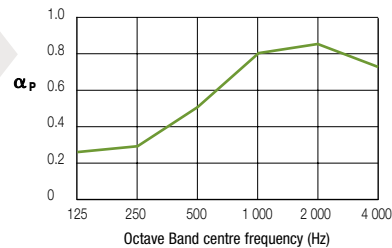

EN 20140-9
& EN 717-1

D_{ncw}	
39 dB	



EEA	Euroclass A1
EN 13501-1	

RUS	KM0 (NG)
FZ 123	



EN 12867
& ISO 8301

$\lambda = 0.067$ W/m K



100 % RH



7 kg/m²
20 kg/m² if wet

*CERAMAGUARD must be installed on Corrosive Resistant 24 mm (CR 24 mm) grid where humidity regularly exceeds 95% RH. CERAMAGUARD may need to have main runners at 600 mm centres due to increased weight in high humidity conditions.

Please contact the Armstrong Technical Sales group for further details.

www.armstrong.eu

Armstrong®